



SC 110

AGM Semi-Cycle Battery

110Ah | 12V | 100h | 850 A

Electrical Specifications

Nominal voltage	12V
Rated capacity	110Ah (at C ₁₀₀)
Separator	AGM
Electrolyte	Sulphuric acid
CCA at -18 °C	850 A
Plate technology	Calcium / Calcium
Cycle Life in Relation to Depth of Discharge	800 Cycles at 30 % DoD 500 Cycles at 50 % DoD 300 Cycles at 80 % DoD 200 Cycles at 100 % DoD

Standards

Standards	IEC 60254 IEC 61427
-----------	------------------------

Discharge Specifications

Discharge rate	C ₅ (5h)	C ₁₀ (10h)	C ₂₀ (20h)	C ₁₀₀ (100h)	Capacity at 25 A
End of discharge voltage	10,20V	10,80V	10,50V	10,80V	10,50V
Discharge capacity	61Ah	84Ah	95Ah	110Ah	175min


Temperature correction factor of discharge capacity

Temperature	-20 °C	-10 °C	0 °C	10 °C	20 °C	40 °C
Correction Factor	0,50	0,70	0,83	0,91	0,97	1,04

Charge Specifications

- Charging profiles: WaW0 and IUIa Charge factor: 1.10 to 1.20

Charge with constant voltage 2.27V per cell at 20°C and limit current 0.1 C₁₀ A

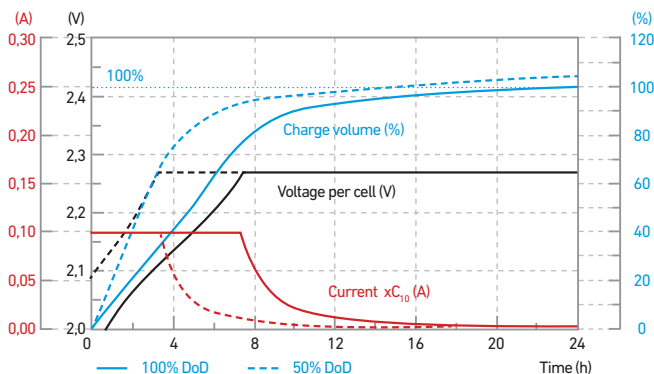

Charge with constant voltage 2.40V per cell at 20°C and limit current 0.2 C₁₀ A

