



SSP 60

Solar Module
60W | 18.21V | Shingle Technology




Electrical Specifications

Rated power	60W
Rated voltage (U _{mp})	18.21V
Rated current (I _{mp})	3.3A
Open-circuit voltage (U _{oC})	21.73V
Short-circuit current (I _{sc})	3.48A
Efficiency	21.4%
Max. system voltage	1000V

Technical Specifications

Temperature range	- 40°C to + 85°C
Solar cells	Monocrystalline
Dimensions	1070 × 350 × 2 mm
Weight	1.5kg
Junction box	IP67 rated
Cell connection	Shingled technology
Cable length	500mm
Connectors	MC4

Dimensions

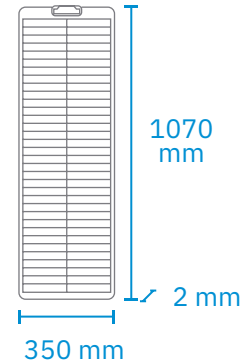

Warranty*



*80% of rated power: 5 years

Flexibility

Solar modules of the ECTIVE SSP FLEX series are lightweight as well as easy to handle and install. Due to their extreme flexibility, these high quality modules can be easily mounted on curved surfaces such as the top of a caravan or campervan.

Shingle Technology

In advanced solar modules with shingle technology, the individual solar cells are arranged in a way so that they overlapped slightly - similar to the shingles on a roof. This structure and a special, highly conductive adhesive mean that the conspicuous copper connectors and main conductor tracks of conventional panels are no longer necessary. This results in various advantages:

- approx. 10 % higher area efficiency compared with conventional monocrystalline cells
- increased efficiency in (partial) shade
- lower resistance and higher performance on a smaller area
- no occurrence of hotspots
- Integrated bypass diodes